

FEATURES


- **COMPACT UNIT:** Standard model with 5-gallon stainless steel reservoir. Can be customized as a Hydraulic Power Unit with a four-way valve and return port.
- **AIR-DRIVEN PISTON PUMP:** Lubricated air-driven pump suitable for explosive environments, pump adjustable entire range, automatically stalls at pre-set pressure, starts when pressure drops below set pressure, enabling the pump to be left unattended.

**SPECIFICATIONS**

PUMP TYPE AND PRESSURE RANGES	Air-driven, lubricated piston pump, 0-1,000, 0-1850, 0-3,000, 0-4,500, 0-6000, 0-10,000, 15,000, 20,000 & 30,000 PSI.
HYDROSTATIC PRESSURE GAUGE	4" dial all stainless steel, glycerin-filled, 0.5% accuracy, full scale. Calibration certificates available extra.
AIR CONTROL SYSTEM	3/8" Air inlet port with ball valve, regulator with gauge, 50 micron filter, pump lubricator.
DISCHARGE PRESSURE MANIFOLD	Stainless manifold, 3/8" NPT outlet port, 1/4" stainless steel drain valve.
RELIEF VALVES (OPTIONAL)	Relief Valves, 1/4" with quick disconnects, 50-350, 350-750, 750-1500, 1500-2250, 2250-3,000, 3,000-4,000, 4,000-5000, 5,000-6,000
HYDROSTATIC HOSE (OPTIONAL)	3/8" Hose x 10 ft. long, with high pressure quick disconnect x 3/8" MPT on one end.
DIMENSIONS & WEIGHT	13" L X 13" W X 24" H, 60 LBS.

ORDERING INFORMATION: Specify pump range, i.e. P100-CR Series, 0-3,000 PSI. Specify Relief Valve range, i.e. 2250-3,000 PSI. Hoses optional, standard 10 ft. lengths, longer hoses available, consult factory. Special gauge calibration with certification available.

P 100-CR SPECIFICATIONS

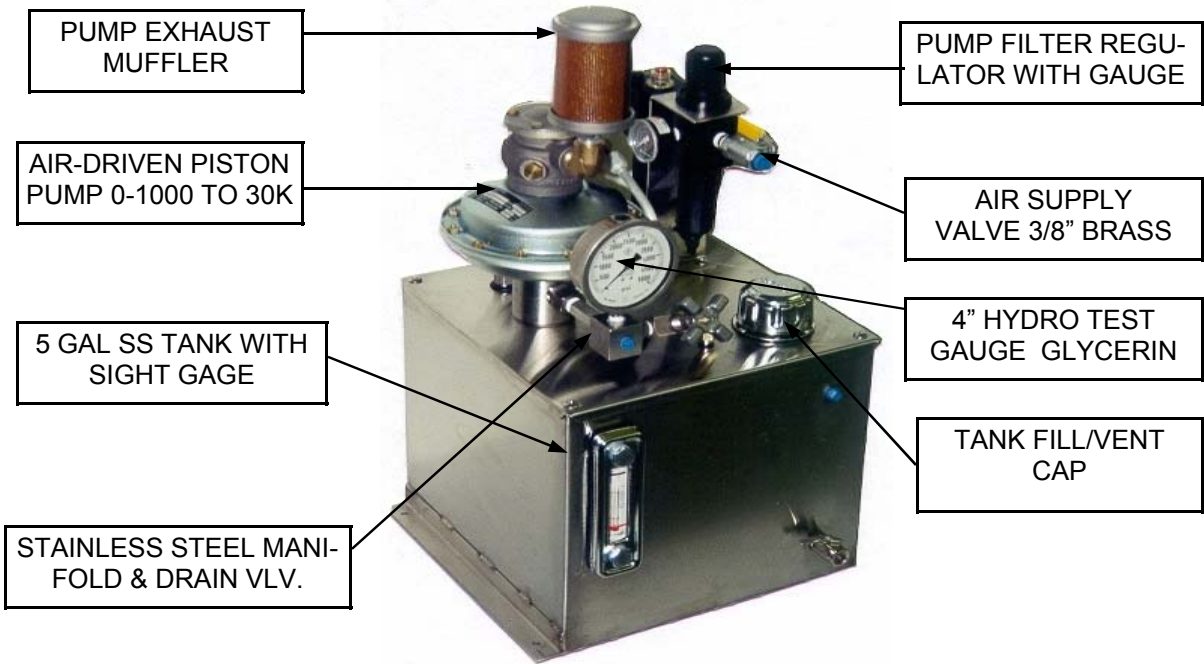

PUMP FLOW CHARTS (CU.IN./MIN.)*

RATIO	PRES-SURE RANGE	FREE FLOW	@ 1000 PSI	@ 2000 PSI	@ 3000 PSI	@ 5000 PSI	@ 10,000 PSI
10:1	1000 PSI	485	320				
20:1	2000 PSI	485	320	150			
30:1	3000 PSI	332	236	174	42		
35:1	4500 PSI	297	200	164	122		
60:1	6000 PSI	213	170	140	107	60	
100:1	8800 PSI	172	126	111	98	76	
125:1	10,000 PSI	78	72	66	60	53	38

* BASED ON 100 PSI SHOP AIR, 25 SCFM FLOW.