

**FEATURES**


- **HEAVY DUTY ROLL FRAME:** 1" square tubular frame powder coated.
- **REMOTE CONTROL:** 20 ft control cable to start/stop pump, and pressure release valve.
- **AIR DRIVEN PUMP:** Available in pressures up to 30,000 PSI. Safe for hazardous environments, compatible with lube oil, kerosene, mineral oil, water, and other fluids. (Consult factory for details.)

**SPECIFICATIONS**

<b>PUMP TYPE AND PRESSURE RANGES</b>	Air-driven piston pump, 0-1,000, 0-1850, 0-3,000, 0-4,500, 0-6000, & 0-10,000, 0-15,000, 0-20,000 & 0-30,000 PSI.
<b>HYDROSTATIC PRESSURE GAUGE</b>	Dual 4" dial all stainless steel, glycerin-filled, 0.5% accuracy, full scale, with quick disconnects.
<b>CONTROL SYSTEM</b>	1/2" solenoid operated poppet valve for air and water, air actuated high pressure ball valve for pressure release.
<b>DISCHARGE PRESSURE MANIFOLD</b>	Stainless steel manifold block, 3/8" NPT outlet port, 1/4" stainless steel drain valve, extra quick disconnect port for relief valve, optional.
<b>HYDROSTATIC HOSE (OPTIONAL)</b>	3/8" Hose x 10 feet long, with high pressure quick disconnect x 3/8" MPT on one end.
<b>DIMENSIONS &amp; WEIGHT</b>	20" L x 15" W x 15" H, 85 lbs.

**ORDERING INFORMATION:** Specify pump range, i.e. P200-RC Series, 0-3,000 PSI. Hoses optional, standard 10 ft. lengths, longer hoses available, consult factory. Special gauge calibration with certification available. Specify type of remote control actuation required. Consult factory for details.

# P200 RC SPECIFICATIONS

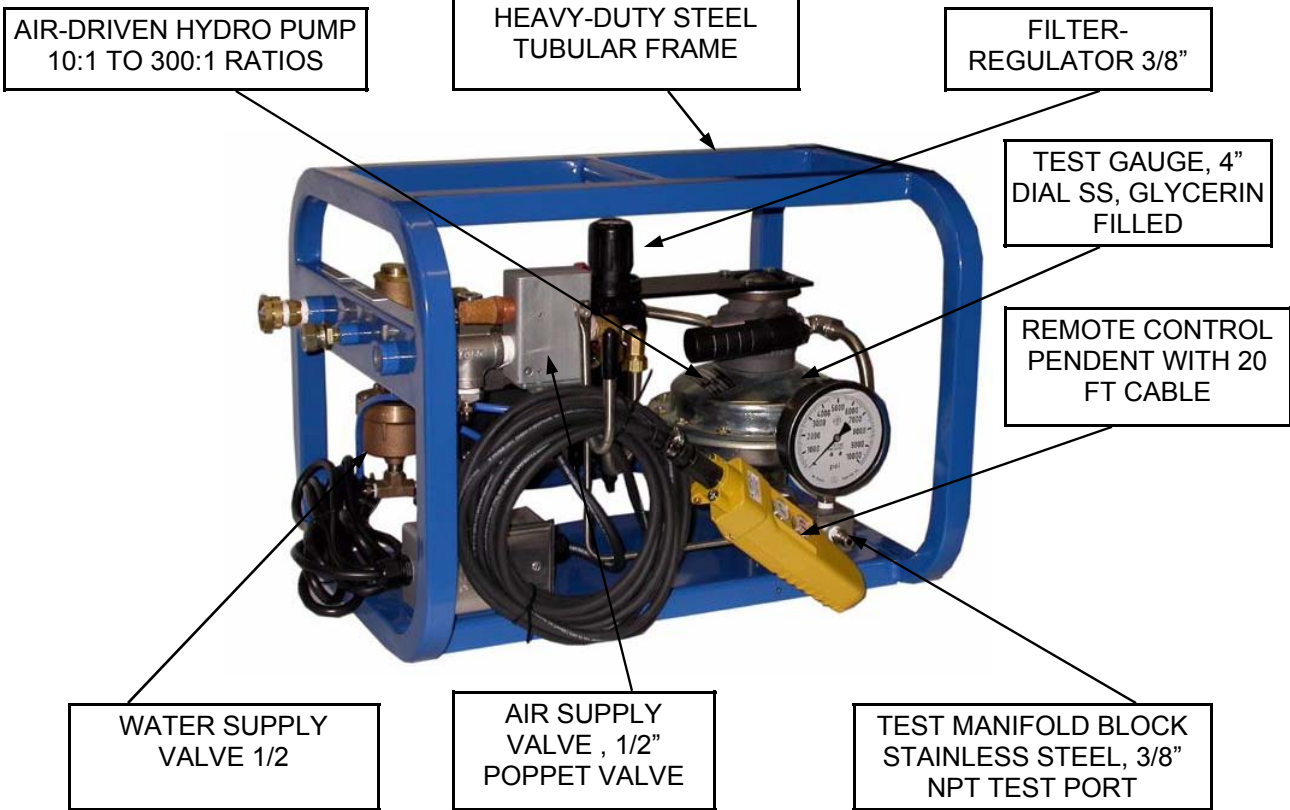

PUMP FLOW CHARTS (CU.IN/MIN.)*							
RATIO	PRES-SURE RANGE	FREE FLOW	@ 1000 PSI	@ 2000 PSI	@ 3000 PSI	@ 5000 PSI	@ 10,000 PSI
10:1	1000 PSI	485	320				
20:1	2000 PSI	485	320	150			
30:1	3000 PSI	332	236	174	42		
35:1	4500 PSI	297	200	164	122		
60:1	6000 PSI	213	170	140	107	60	
100:1	8800 PSI	172	126	111	98	76	
125:1	10,000 PSI	78	72	66	60	53	38

\* BASED ON 100 PSI SHOP AIR, 25 SCFM FLOW.