

FEATURES


- **HEAVY DUTY ROLL FRAME:** 1" square tubular frame powder coated.
- **STAINLESS STEEL TANK:** 1 gallon stainless steel tank with sight gauge, vent/fill cap.
- **AIR DRIVEN PUMP:** Available in pressures up to 30,000 PSI. Safe for hazardous environments, compatible with lube oil, kerosene, mineral oil, water, and other fluids. (Consult factory for details.)

**SPECIFICATIONS**

PUMP TYPE AND PRESSURE RANGES	Air-driven piston pump, 0-1,000, 0-1850, 0-3,000, 0-4,500, 0-6000, & 0-10,000, 0-15,000, 0-20,000 & 0-30,000 PSI.
HYDROSTATIC PRESSURE GAUGE	Dual 4" dial all stainless steel, glycerin-filled, 0.5% accuracy, full scale, with quick disconnects.
AIR CONTROL SYSTEM	3/8" Air inlet port with stainless steel ball valve, filter-regulator with gauge, 50 micron filter.
DISCHARGE PRESSURE MANIFOLD	Stainless steel manifold block, 3/8" NPT outlet port, 1/4" stainless steel drain valve, extra quick disconnect port for relief valve, optional.
RESERVOIR TANK	1 gallon stainless steel tank with 3/4" Fill/Vent cap, sight gauge, and drain valve.
HYDROSTATIC HOSE (OPTIONAL)	3/8" Hose x 10 feet long, with high pressure quick disconnect x 3/8" MPT on one end.
DIMENSIONS & WEIGHT	20" L x 15" W x 15" H, 75 lbs.(dry weight)

ORDERING INFORMATION: Specify pump range, i.e. P200 Series, 0-3,000 PSI. Hoses optional, standard 10 ft. lengths, longer hoses available, consult factory. Special gauge calibration with certification available.

P200 VR SPECIFICATIONS

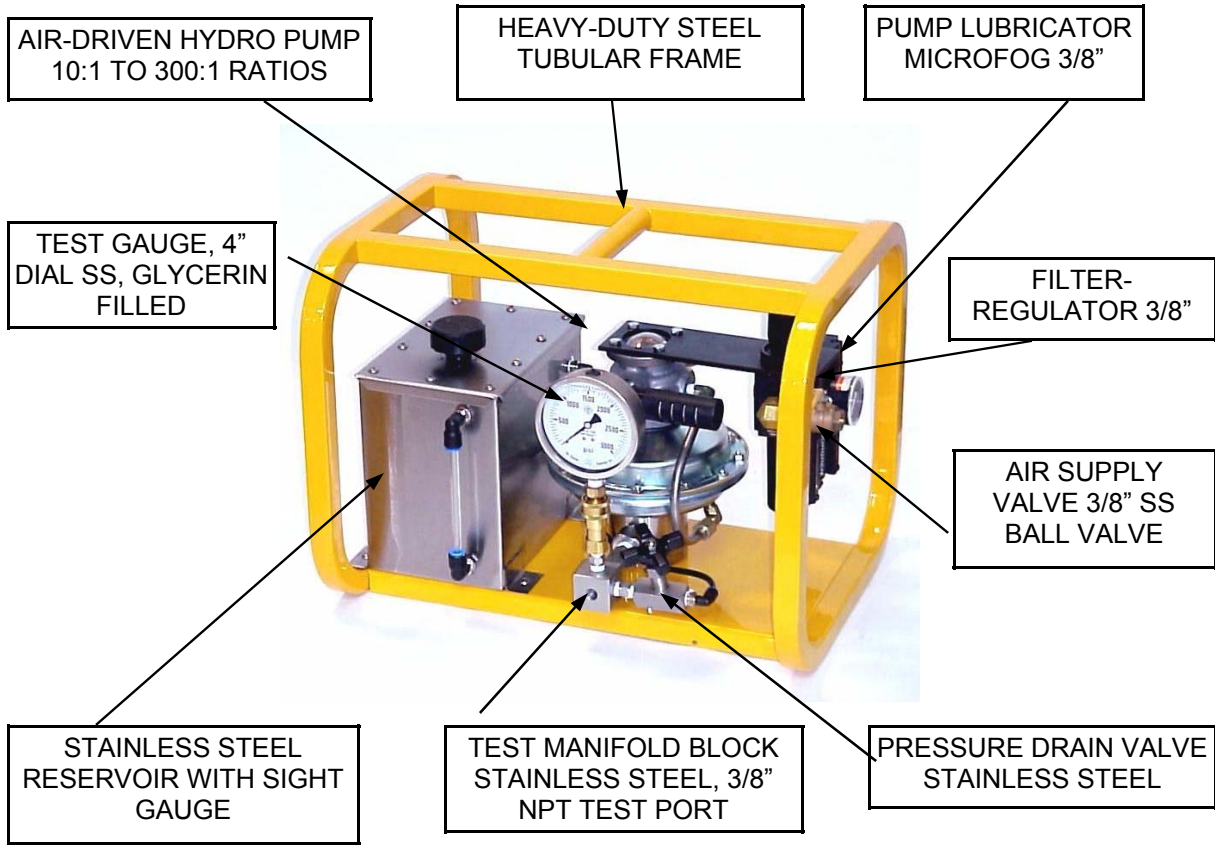

PUMP FLOW CHARTS (CU.IN./MIN.)*

RATIO	PRES- SURE RANGE	FREE FLOW	@ 1000 PSI	@ 2000 PSI	@ 3000 PSI	@ 5000 PSI	@ 10,000 PSI
10:1	1000 PSI	485	320				
20:1	2000 PSI	485	320	150			
30:1	3000 PSI	332	236	174	42		
35:1	4500 PSI	297	200	164	122		
60:1	6000 PSI	213	170	140	107	60	
100:1	8800 PSI	172	126	111	98	76	
125:1	10,000 PSI	78	72	66	60	53	38

* BASED ON 100 PSI SHOP AIR, 25 SCFM FLOW.